



XCELLENT
WeimaxTM

LED
LIGHTS
SKD

MADE IN INDIA

The logo for Xcelleent Wellmax, featuring the word "XCELLENT" in small, spaced-out capital letters above the word "Wellmax" in a larger, bold, sans-serif font. The entire logo is contained within a teal rectangular box.

XCELLENT
Wellmax

XCELLENT WELLMAX
is a distinguished
Manufacturer, Wholesaler
and Trader offering an
enormous range of SKD
(Semi Knocked Down) of
all types of LED Lights and
more.

Immensely acclaimed in
the industry owing to their
preciseness, these are
presented by us in
standard forms to our
clients. These are
inspected sternly to retain
their optimum quality.

Under the administration
of our Well trained and
highly qualified team, we
have garnered a reputed
position in this highly
competitive industry.


The text "LED LIGHTS SKD" is displayed in a bold, sans-serif font. "LED" and "LIGHTS" are in white, while "SKD" is in teal. The text is enclosed within a thin teal rectangular border.

**LED
LIGHTS
SKD**

MADE IN INDIA

XCELLENT
Weimax

ALUMINIUM SLIM LED PANEL

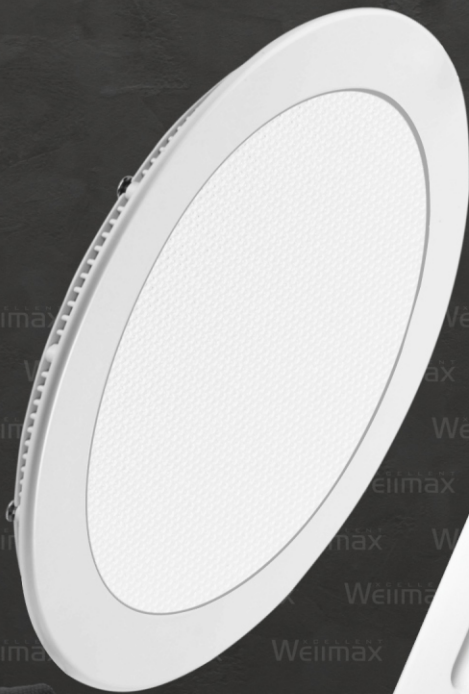

SKD

CONCEAL

2835 SMD LED

**MODEL
SLIM
PANEL**

Item No.	Size(mm)	Cut-Out Size(mm)	Weight	PCB Size (mm)	LGP Size(mm)
SL-RD-3W	Φ90	Φ70	42g	179*6	Φ56
SL-RD-6W/8W	Φ120	Φ105	72g	289*6	Φ90
SL-RD-9W	Φ145	Φ130	102g	366*6	Φ115
SL-RD-12W/15W	Φ170	Φ155	133g	438*6	Φ138
SL-RD-15W	Φ190	Φ170	163g	500*6	Φ157
SL-RD-18W/22W	Φ225	Φ205	203g	591*6	Φ187
SL-RD-24W/30W	Φ300	Φ285	327g	414*6*2	Φ262
SL-SQ-3W	90*90	70*70	55g	221*6	56*56 R8
SL-SQ-6W/8W	120*120	105*105	93g	331*6	87*87 R13
SL-SQ-9W	145*145	130*130	136g	445*6	105.5*105.5 R7
SL-SQ-12W/15W	170*170	155*155	160g	527*6	135.5*135.5 R13
SL-SQ-15W	190*190	170*170	198g	615*6	158*158 R13
SL-SQ-18W/22W	225*225	205*205	242g	728*6	186*186 R13
SL-SQ-24W/30W	300*300	285*285	409g	507*6*2	257.5*257.5 R13

■ SQUARE ● ROUND

 METAL STRUCTURE

|| SLIM BODY

 ANTI GLARE DIFF.

XCELLENT
Weiimax™

ALUMINIUM SURFACE LED PANEL



SKD

SURFACE

2835 SMD LED

**MODEL
SURFACE
PANEL**

Item No.	Size(mm)	Cut-Out Size(mm)	Weight	PCB Size(mm)	LGP Size(mm)
SF-RD-3W	Φ90	—	45g	179*6	Φ56
SF-RD-6W/8W	Φ120	—	123g	289*6	Φ90
SF-RD-12W/15W	Φ170	—	173g	438*6	Φ115
SF-RD-18W/22W	Φ225	—	276g	591*6	Φ157
SF-RD-24W/30W	Φ300	—	370g	414*6*2	Φ187
SF-SQ-3W	90*90	—	55g	221*6	56*56 R8
SF-SQ-6W/8W	120*120	—	136g	331*6	87*87 R13
SF-SQ-12W/15W	170*170	—	218g	527*6	135.5*135.5 R13
SF-SQ-18W/22W	225*225	—	328g	728*6	186*186 R13
SF-SQ-24W/30W	300*300	—	485g	507*6*2	257.5*257.5 R13

■ SQUARE ● ROUND

 METAL STRUCTURE

|| SLIM BODY

 ANTI GLARE DIFF.

XCELLENT
Weiimax™

DOUBLE COLOR SLIM LED PANEL



CONCEAL



**MODEL
DOUBLE
COLOR
PANEL**

Item No.	Size(mm)	Cut-Out Size(mm)	Weight	PCB-1(mm) WH/WW/NW	PCB-2(mm) BL/GR/PK/RGD
SL-3+3W-RD	Φ105*H25	Φ90	33g	173*6 15D	208*6 30D
SL-6+3W-RD	Φ145*H25	Φ120	66g	286*6 30D	264*6 30D
SL-12+4W-RD	Φ195*H25	Φ160	115g	438*6 60D	471*6 40D
SL-3+3W-SQ	105*105*H25	90*90	52g	212*6 15D	264*6 30D
SL-6+3W-SQ	145*145*H25	120*120	90g	331*6 30D	387*6 30D
SL-12+4W-SQ	195*195*H25	160*160	147g	527*6 60D	582*6 40D

■ SQUARE

● ROUND



METAL STRUCTURE

UPGRADED DRIVER



ANTI GLARE DIFF.

XCELLENT
Weimax

DOUBLE COLOR SURFACE LED PANEL



COLORFUL
OUTER
RING

SKD

SURFACE

Item No.	Size(mm)	Cut-Out Size(mm)	Weight	PCB-1 (mm) WH/WW/NW	PCB-2 (mm) BL/GR/PK/RGD
SL-3+3W-RD	Φ105*H25	--	33g	173*6 15D	208*6 30D
SL-6+3W-RD	Φ145*H25	--	66g	286*6 30D	264*6 30D
SL-12+4W-RD	Φ195*H25	--	115g	438*6 60D	471*6 40D
SL-3+3W-SQ	105*105*H25	--	52g	212*6 15D	264*6 30D
SL-6+3W-SQ	145*145*H25	--	90g	331*6 30D	387*6 30D
SL-12+4W-SQ	195*195*H25	--	147g	527*6 60D	582*6 40D

MODEL
DOUBLE
COLOR
SURFACE



SQUARE



ROUND



METAL STRUCTURE



UPGRADED DRIVER



ANTI GLARE DIFF.

XCELLENT
Weiimax™

FLAT DOWNLITE



MODEL FLAT DOWNLIGHT

Item No.	Size(mm)	Cut-Out Size(mm)	Weight	MCPCB(mm)
DL-7W-RD	Φ90	Φ75	65g	55mm
DL-16W-RD	Φ120	Φ105	127g	86mm
DL-24W-RD	Φ170	Φ155	200g	134mm
DL-32W-RD	Φ225	Φ210	295g	186mm
DL-7W-SQ	90*90	75*75	90g	55*55mm
DL-16W-SQ	120*120	105*105	133g	86*86mm
DL-24W-SQ	170*170	155*155	240g	136*136mm
DL-32W-SQ	225*225	210*210	385g	190*190mm

■ SQUARE ● ROUND  METAL STRUCTURE  UPGRADED DRIVER  ANTI GLARE DIFF.

XCELLENT
Weimax

COB LIGHT



ANTIGLARE
REFLECTOR

SKD

MODEL WLCB-01 WLCB-02

Item No.	Size(mm)	Cut-Out Size(mm)	Body Color	Chip Size(mm)	Beam Angle
WLCB01-7W	Φ59*69	Φ50	White/Black	13.5*13.5*8	24°
WLCB01-12W	Φ82*79	Φ74	White/Black	13.5*13.5*11	38°
WLCB01-18W	Φ95*100	Φ85	White/Black	13.5*13.5*11	38°
WLCB02-7W	Φ75*60	Φ65	Black+RGD	13.5*13.5*11	24°
WLCB02-12W	Φ85*80	Φ75	White+CH	13.5*13.5*11	38°
WLCB02-18W	Φ95*100	Φ85	White+Black	13.5*13.5*11	38°

 POWER SAVING

 LONGER LIFE CYCLE

 UPGRADED DRIVER

 HIGH LUMEN

XCELLENT
Weiimax™

TRIMLESS
COB



MODEL
WLCB-03

Item No.	Size(mm)	Cut-Out Size(mm)	Body Color	Chip Size(mm)	Beam Angle
WLCB03-7W	Φ39*H52	Φ35	RGD / BK	13.5*13.5*8	38°
WLCB03-7W	Φ39*H52	Φ35	RGD / BK	13.5*13.5*8	38°
WLCB03-12W	Φ60*H63	Φ55	RGD / BK	"15.8*15.8*11, 13.5*13.5*11"	38°
WLCB03-12W	Φ60*H63	Φ55	RGD / BK	"15.8*15.8*11, 13.5*13.5*11"	38°

 POWER SAVING

 LONGER LIFE CYCLE

 UPGRADED DRIVER

 HIGH LUMEN

XCELLENT
Weimax

SURFACE COB LIGHT



UNIQUE
SHAPE

SKD

Item No.	Power	Dimension(mm)	Body Color	Chip Size(mm)	Beam Angle
WLCB04-5W	5W	Φ50*70	WH+RGD WH+ BK BK+RGD BK+BK	13.5*13.5*11	24°
WLCB04-10W	10W	Φ70*90	WH+RGD WH+ BK BK+RGD BK+BK	13.5*13.5*11	36°
WLCB04-15W	15W	Φ95*100	WH+RGD WH+ BK BK+RGD BK+BK	13.5*13.5*11	36°

MODEL
WLCB-04

 POWER SAVING

 LONGER LIFE CYCLE

 UPGRADED DRIVER

 HIGH LUMEN

XCELLENT
Weiimax™

CYLINDER COB LIGHT



MODEL WLCB-05A WLCB-05

Item No.	Power	Body Color	Dimension(mm)	Chip Size(mm)	Beam Angle
WLCB05-6W	6W	WH + RGD, WH + BK, BK + RGD, BK + BK, WH + CH, BK + CH	Φ60*75	13.5*13.5*11	24°
WLCB05-12W	12W	WH + RGD, WH + BK, BK + RGD, BK + BK, WH + CH, BK + CH	Φ70*85	13.5*13.5*11	36°
WLCB05-18W	18W	WH + RGD, WH + BK, BK + RGD, BK + BK, WH + CH, BK + CH	Φ85*100	13.5*13.5*11	36°
WLCB05A-6W	6W	WH + RGD, WH + BK, BK + RGD, BK + BK, WH + CH, BK + CH	Φ60*80	13.5*13.5*11	24°
WLCB05A-12W	12W	WH + RGD, WH + BK, BK + RGD, BK + BK, WH + CH, BK + CH	Φ70*90	13.5*13.5*11	36°
WLCB05A-18W	18W	WH + RGD, WH + BK, BK + RGD, BK + BK, WH + CH, BK + CH	Φ85*100	13.5*13.5*11	36°

 POWER SAVING


 LONGER LIFE CYCLE

 UPGRADED DRIVER

 HIGH LUMEN

XCELLENT
Weimax

**TRACK
LIGHT**



**TRACK
FITTING**

SKD

**MODEL
WLCB06
WLCB07**

Item No.	Power	Body Color	Dimension(mm)	Chip Size(mm)	Beam Angle
WLCB06-10W	10W	BK/WH	Φ50*130	13.5*13.5*11	36°
WLCB06-20W	20W	BK/WH	Φ65*160	19*19*17	36°
WLCB06-30W	30W	BK/WH	Φ75*180	19*19*17	36°
WLCB07-10W	10W	BK/WH	Φ50*130	13.5*13.5*11	36°
WLCB07-20W	20W	BK/WH	Φ65*160	19*19*17	36°
WLCB07-30W	30W	BK/WH	Φ75*180	19*19*17	36°

 POWER SAVING


 LONGER LIFE CYCLE

 UPGRADED DRIVER

 HIGH LUMEN

XCELLENT
Weimax

DEEP SPOT COB LIGHT



MODEL WLCB-08

Item No.	Power	Size(mm)	Cut-Out Size(mm)	Body Color	Chip Size(mm)	Beam Angle
WLCB08-3W	3W	Φ38*28	Φ28	WH	13.5*13.5*11	38°
WLCB08-3W	3W	Φ38*28	Φ28	BK	13.5*13.5*11	38°
WLCB08-3W	3W	Φ38*28	Φ28	RGD	13.5*13.5*11	38°
WLCB08-3W	3W	Φ38*28	Φ28	NICKEL	13.5*13.5*11	38°

 POWER SAVING

 LONGER LIFE CYCLE

 UPGRADED DRIVER

 HIGH LUMEN

XCELLENT
Weimax

CURVE COB LIGHT



SKD

MODEL WLCB-09

Item No.	Size (mm)	Cut-Out Size (mm)	Body Color	Chip Size (mm)	Beam Angle
WLCB09-7W	Φ70*50	Φ65	BK + RGD, BK + BK , WH + BK, WH+RGD	13.5*13.5*11	24°
WLCB09-12W	Φ85*65	Φ80	BK + RGD, BK + BK , WH + BK, WH+RGD	13.5*13.5*11	24°
WLCB09-18W	Φ95*75	Φ90	BK + RGD, BK + BK , WH + BK, WH+RGD	13.5*13.5*11	24°

 POWER SAVING

 LONGER LIFE CYCLE

 UPGRADED DRIVER

 HIGH LUMEN

XCELLENT
Weiimax™

DEEP DOWNLITE



MODEL WLDT10

Item No.	Size(mm)	Cut-Out Size(mm)	Weight	MCPCB (mm)
WLDT10-12W-RD	Φ120	Φ115	117g	70mm
WLDT10-18W-RD	Φ155	Φ145	168g	98mm
WLDT10-24W-RD	Φ175	Φ165	198g	114mm
WLDT10-12W-SQ	110*110	105*105	168g	70*70mm
WLDT10-18W-SQ	145*145	135*135	247g	98*98mm
WLDT10-24W-SQ	170*170	160*160	258g	114*114mm

■ SQUARE ● ROUND



METAL STRUCTURE




UPGRADED DRIVER



ANTI GLARE DIFF.

XCELLENT
Weiimax™

MOVABLE COB LIGHT



MODEL WLCB-11

Item No.	Power	Size (mm)	Cut-Out Size(mm)	Chip Size(mm)	Beam Angle
WLCB11-3W	3W	Φ67*36	Φ47	13.5*13.5*11	24°
WLCB11-6W	6W	Φ88*56	Φ64	13.5*13.5*11	38°
WLCB11-9W	9W	Φ88*67	Φ64	13.5*13.5*11	38°
WLCB11-16W	16W	Φ110*75	Φ86	19*19*17	55°
WLCB11-24W	24W	Φ138*98	Φ109	19*19*17	55°
WLCB11-30W	30W	Φ160*113	Φ135	28*28*24.5	55°
WLCB11-50W	50W	Φ160*130	Φ135	28*28*24.5	55°



POWER SAVING



LONGER LIFE CYCLE




UPGRADED DRIVER




HIGH LUMEN

ISOLATED 3 IN 1 LPF DRIVER



Item No.	Power	Voltage	Output Voltage	Power Factor	Constant Current	Surge
6W 3C 0.6PF 300MA	6W	100-265V	DC15-24V	0.6	300MA	2.5KV
12W 3C 0.6PF 300MA	12W	100-265V	DC30-42V	0.6	300MA	2.5KV
18W 3C 0.6PF 300MA	18W	100-265V	DC45-63V	0.6	300MA	2.5KV

ISOLATED DOUBLE COLOR LPF DRIVER





Item No.	Power	Voltage	Output Voltage	Power Factor	Constant Current	Surge
3+3W 3C	3+3W	100-265V	3-12V	0.6	230-250MA	2.5KV
6+3W 3C	6+3W	100-265V	12-24V	0.6	240-260MA	2.5KV
12+4W 3C	12+4W	100-265V	24-36V	0.6	260-280MA	2.5KV

ISOLATED 0.95 PF DRIVER



Item No.	Power	Voltage	Output Voltage	Power Factor	Constant Current	Surge
4-7W 0.95P 300MA	4-7W	100-440V	DC12-28V	0.9PF	300MA	2.5KV
8-12W 0.95P 300MA	8-12W	100-440V	DC24-48V	0.9PF	300MA	2.5KV
13-18W 0.95P 300MA	13-18W	100-440V	DC39-72V	0.9PF	300MA	2.5KV
19-24W 0.95P 300MA	19-24W	100-440V	DC54-96V	0.9PF	300MA	2.5KV
30-36W 0.95P 300MA	30-36W	100-400V	DC24-48V	0.9PF	300MA	2.5KV
30-36W 0.95P 750MA	30-36W	100-440V	DC24-48V	0.9PF	750MA	2.5KV
50W 0.95P 1200MA	30-36W	100-440V	DC24-48V	0.9PF	900MA	2.5KV
30-36W 0.95P 900MA	48-50W	100-440V	DC24-48V	0.9PF	1200MA	2.5KV

ISOLATED 0.5 LPF DRIVER




Item No.	Power	Voltage	Output Voltage	Power Factor	Constant Current	Surge
1-3W	1-3W	110-265V	DC3-12V	0.6PF	300MA	2.5KV
4-7W 0.6P 300MA	4-7W	110-265V	DC12-28V	0.6PF	300MA	2.5KV
8-12W 0.6P 300MA	8-12W	110-265V	DC24-48V	0.6PF	300MA	2.5KV
13-18W 0.6P 300MA	13-18W	110-265V	DC39-72V	0.6PF	300MA	2.5KV
18-24W 0.6P 600MA	18-24W	110-265V	DC52-94V	0.6PF	300MA	2.5KV

NON-ISOLATED DRIVER




Item No.	Power	Voltage	Output Voltage	Power Factor	Constant Current	Surge
8-24W 0.5P	8-24W	100-265V	DC30-80V	0.5PF	280MA	2.5KV
8-24W 0.95P	8-24W	100-265V	DC30-80V	0.95PF	280MA	4KV

NON ISOLATED 3 IN 1 LPF DRIVER



Item No.	Power	Voltage	Output Voltage	Power Factor	Constant Current	Surge
1-3W	1-3W	110-265V	DC3-12V	0.6PF	300MA	2.5KV
4-7W 0.6P 300MA	4-7W	110-265V	DC12-28V	0.6PF	300MA	2.5KV
8-12W 0.6P 300MA	8-12W	110-265V	DC24-48V	0.6PF	300MA	2.5KV
13-18W 0.6P 300MA	13-18W	110-265V	DC39-72V	0.6PF	300MA	2.5KV

WATER PROOF DRIVER



Item No.	Power	Voltage	Output Voltage	Power Factor	Constant Current	Surge	IP RATING
WP-50W	50W	85-285V	50-60V	>0.95	1500MA	6KV	65

COB CHIP

Power Chip Size(mm) Color LM RA Remark



1W

13.5*13.5*8

WH/WW/NW
BL/RD/GR/PK

70-80LM/W

Ra>80

2B1C



3W

13.5*13.5*11

WH/WW/NW
BL/RD/GR/PK

130-140LM/W

Ra>80

2B3C



5W

13.5*13.5*11

WH/WW/NW

130-140LM/W

Ra>80

3B5C



7W

13.5*13.5*8
13.5*13.5*11

WH/WW/NW

130-140LM/W

Ra>80

3B7C



10W

13.5*13.5*11

WH/WW/NW

130-140LM/W

Ra>80

3B10C



12W

13.5*13.5*11

WH/WW/NW

130-140LM/W

Ra>80

3B12C



15W

19*19*17

WH/WW/NW

130-140LM/W

Ra>80

3B15C



15W

13.5*13.5*11

WH/WW/NW

130-140LM/W

Ra>80

3B15C



18W

19*19*17

WH/WW/NW

130-140LM/W

Ra>80

3B18C



20W

19*19*17

WH/WW/NW

130-140LM/W

Ra>80

3B20C



24W

19*19*17

WH/WW/NW

130-140LM/W

Ra>80

2B24C



30W

19*19*17

WH/WW/NW

130-140LM/W

Ra>80

5B12C



50W

19*19*17

WH/WW/NW

130-140LM/W

Ra>80

8B12C



30W

28.5*28.5*24

WH/WW/NW

130-140LM/W

Ra>80

5B12C



50W

28.5*28.5*24

WH/WW/NW

130-140LM/W

Ra>80

8B12C



7W

13.5*13.5*8
13.5*13.5*11

3in1

130-140LM/W

Ra>80

2B7C*2



12W

13.5*13.5*8
15.85*15.85*11

3in1

130-140LM/W

Ra>80

2B12C*2



15W-20W

19*19*17

3in1

130-140LM/W

Ra>80

4B12C*2

XCELLENT
Weimax™

**LED
LIGHTS
SKD**

MADE IN INDIA

XCELLENT LITE LLP

Building No. E4, Shree Rajlaxmi Hi Tech Textile Park,
Near Satyam Petrol Pump, Nashik Highway Road,
Sonale Village, Bhiwandi - 421302

CALL FOR SKD NOW :

80978 08011

88282 45050

97009 01313

www.wellmaxlights.com